


GNR-410

128-Channel 2U Rackmount Standalone NVR



- 128 channels, 64 Free Licenses
- Storage Bay(s)
- SATA, iSCSi, USB
- Rack Space: 2U, Rackmount Standalone NVR
- Windows 10 IoT
- Intel Core i5-4590S
- HDMI x 1, VGA x 1, Display Port x 1,
- Workstation, Web Client, Mobile Client

▶ ****Solution Diagram****

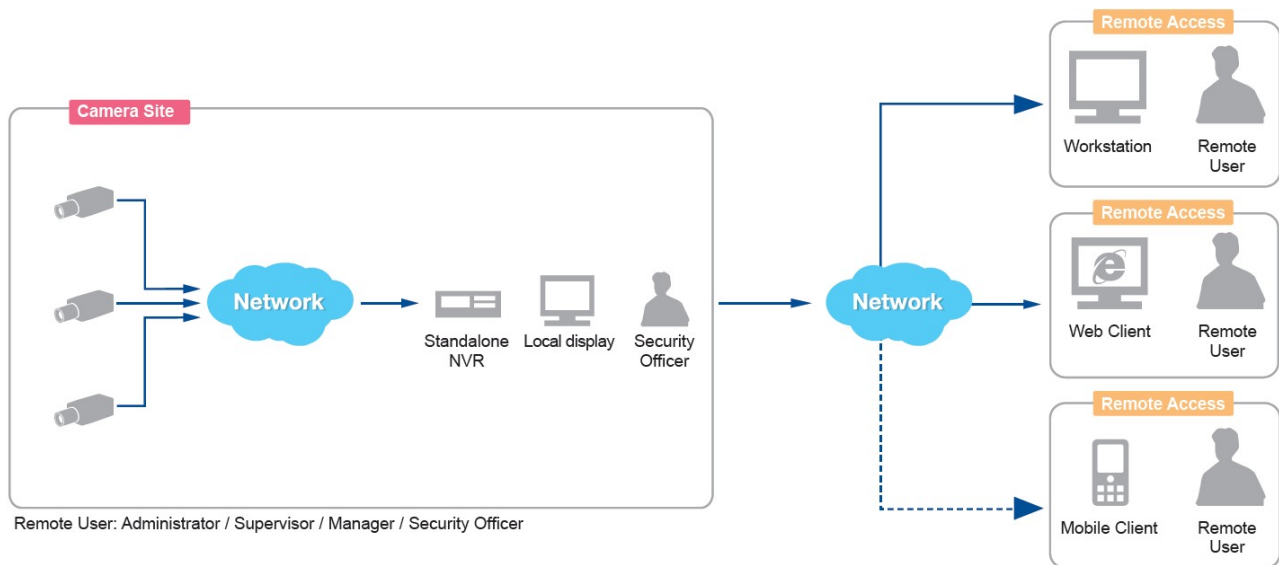

▶ **Specifications**

Product Profile

Product Type	Standalone NVR
--------------	----------------

Maximum Resolution	Support all ACTi cameras in all resolutions
Maximum Number of Video Devices	128
Maximum Number of POS devices	64 (requires additional license)
Maximum Number of Access Control and Network I/O devices	64 (requires additional license)
Maximum Number of Clients	Local: 1, Remote: 1

Hardware

CPU	Intel Core i5-4590S
RAM	8GB

License

License required	Yes
Free License	64 (64 channels for ACTi and 1 channel for third-party video device)

Live View

Display Layout Mode	Local: 1, 3, 4, 5, 6, 8, 9, 10, 12, 16 Remote (IE client): 1, 3, 4, 5, 6, 8, 9, 10, 12, 16, 18, 24, 25, 35, 36, 48, 49, 64 Remote (Lite web client): 1, 3, 4, 5, 6, 8, 9, 10, 12, 16 Remote (Workstation): 1, 3, 4, 5, 6, 8, 9, 10, 12, 16, 18, 24, 25, 35, 36, 48, 49, 64, 81, 100, 121 (11x11), 144 (12x12), 169 (13x13), 196 (14x14), 225 (15x15) ** NVR 3 display grid cells can be merged into different shape and size.
Fisheye Dewarping	Yes (Live View, Playback, Export)
Local Live View performance	Please check "Standalone NVR Performance Validator" (http://www.acti.com/SANVRPerformance)
Digital Zoom	Yes
Event Status	Display event status upon alarm or upon connection loss or recovery between server and client or when the allocated disk space is full
Instant Playback	Instant Playback in live view window
Embedded websites in Live View	Display and connect to pre-configured embedded website

Map

e-Map	Yes
Layout	Area maps with camera icons, small live view windows, hyperlinked
Setup	e-Map image upload, Google maps settings and preset management, camera positioning, vision angle and pointed direction of camera, view positioning, source positioning, extended devices for Point-of-sale (POS), Access Control, Network I/O, Car Park
PTZ Mode	Mouse PTZ mode to control e-Map video streams

PTZ

PTZ Control	PTZ Control, Speed Control, 32 preset points
Joystick	USB based joystick supported

Video	
Compression	H.265, H.264, MPEG-4, MJPEG

Audio	
Audio Type	2-way, Mic-in, Line-in, Line-out

Network	
Network Protocol & Service	IPv4/v6, TCP, UDP, DHCP Client, HTTP, DNS, NTP, RTP, RTSP, SMTP, FTP, ICMP, ARP, UPnP, LDAP (client), iSCSi
Ethernet Port	Total ports: 2 port(s) Non-PoE: 2 port(s), Ethernet (100/1000 Base-T), RJ-45 connector

Recording	
Scheduled Recording	Yes
Event Recording	Yes
Manual Recording	Yes
Event Speed-up Recording	Yes
Dual Stream Management	Yes
Maximum Recording Throughput	160 Mbps Option 1: 128 channels : 1MP, 1.5Mbps bitrate Option 2: 64 channels : 2MP, 2.5Mbps bitrate Option 3: 32 channels : 4MP, 5Mbps bitrate

Search & Playback	
Playback Control	Continuous forward and backward playback with speeds 1x/2x/4x/8x/16x or frame-by-frame, pause, stop
Synchronized Playback	up to 225 layout grids**
Recording Search	Search video recordings by time, events, channels, bookmarks, notifications and listed as clickable time-based thumbnails for full-size view and snapshot download
Video Export	RAW, AVI, EXE

Event	
Event Trigger	[NVR]: Disk full, Disk not found, Disk is available, Schedule service start and stop, Video Push start and stop, CPU limit exceeded. [Video Device]: Video motion detection, Passive IR sensor, External device through digital input, Sound detection, Intelligent event detection, Video Push start and stop, Video loss, Video Recovery, Network loss and recovery. [Extended Device]: Point-of-sale (POS) status, Network I/O status, Access Control status, Car park status
Event Response	Pop-up window with live video and event confirmation activation, Switch to hotspot window, Switch to customize view, Command a PTZ device to go to a preset point, Play alert sound, Activate external device through digital output, Execute system command to activate other programs, Upload video or snapshot to FTP server, E-mail notification with snapshots, Push notification

Redundancy Server	
Redundancy Service	Yes, N+1 (With limited functions when NVR 3 server acts as Redundancy server)

System	
Permission control	Unlimited number of users, Active Directory, Customizable permissions for user groups, Account lockout, Automatic logout after idle, Playback password protected, Password validity period

Watchdog	Support
Server Operating System	Windows 10 IoT
Client PC Operating System	Windows 7 SP1, Windows 8.1, Windows 10, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016
Server and Client PC requirements	Please use https://www.acti.com/pcselector For client PC requirements, please check the Performance: Live View section.
Mobile Client Program	Mobile device application (ACTi Mobile Client) supports Live View, PTZ Control, Video Push, Event/time based search and playback, Supported device(s) iPhone, Android device
USB	2-Port USB 2.0, 4-Port USB 3.0
Language	Multi-Language

Integration

Unified Solution	Fully compatible with ACTi cameras, encoders, central management system, TV wall and intelligent video surveillance software
GPS Position	Manual setting
ONVIF Compliant	Yes, Profile S
Web Browser	IE 11 (Please verify that your computer meets the minimum system requirements for Internet Explorer from Microsoft website.)
Third-party Integration	Point of Sale (POS), Access Control, Network I/O, Parking Management Station (PMS), (Various optional integrations requiring additional license)

Storage

Supported Storage Technology	NAS, SAN
System Drive	mSATA SSD, 128GB
Storage Bay	SATA, Max. 8 Disk(s) (without storage disks)
HDD Size	3.5"
Maximum Recording Capacity	14TB x8
Supported Storage	Video Recording: SATA disk, iSCSI Video Exporting: iSCSI, USB

Interface

External Storage Interface	eSATA, iSCSI, USB
Local Access	USB joystick, keyboard & mouse
Local Display Interface	HDMI x 1, VGA x 1, Display Port x 1,


General

Power Source	AC 100-240V
Power Consumption	300 W (AC)
Weight	11400g (25.132lb)
Dimensions	Rack Space: 2U (W x H x D): 482.6mm x 88mm x 560mm (19" x 3.464" x 22.047")
Mount Type	Rackmount rails(19", 26")
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	10% - 85% RH, non-condensing

Remote Access	Workstation, Web Client, Mobile Client
Approvals	CE, FCC, UL (for built-in power adapter)
Warranty	3 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty


** The actual maximum number of channels may vary depending on the server/client PC performance and network throughput.

► Photo Indication

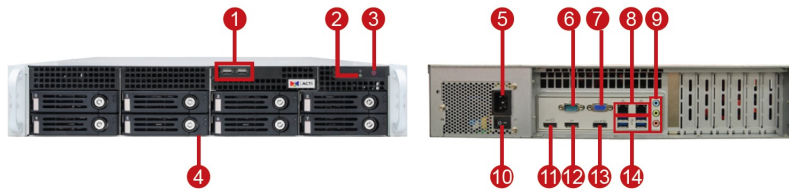

- | | |
|-------------------|-----------------|
| 1 USB 2.0 Ports | 8 Ethernet Port |
| 2 Power LED | 9 Audio Ports |
| 3 Power Button | 10 Power Switch |
| 4 Storage Disks | 11 HDMI Port |
| 5 Power Connector | 12 Display Port |
| 6 Serial Port | 13 eSATA Port |
| 7 VGA Port | 14 USB 3.0 Port |


► Dimension Diagram

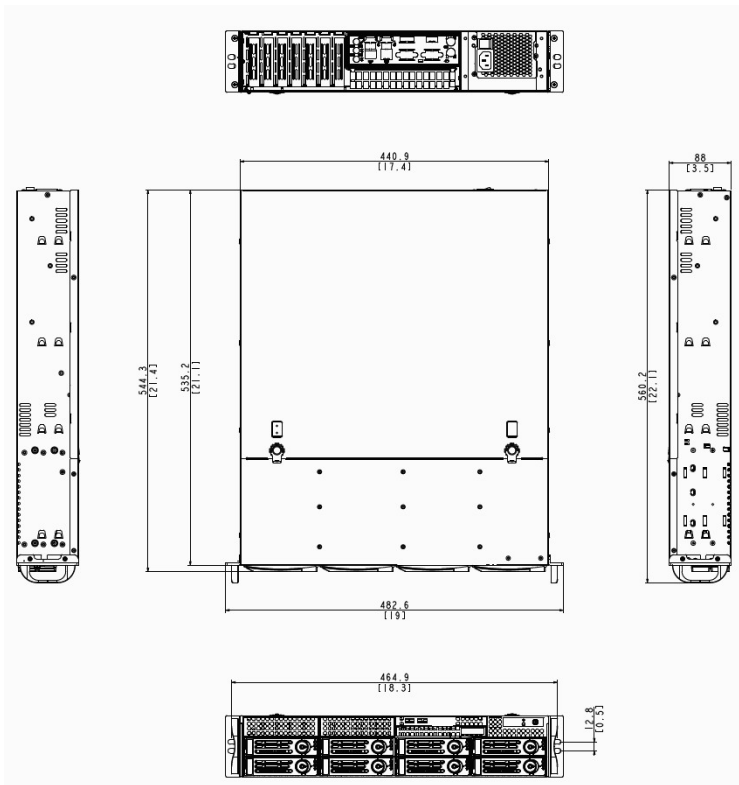

Unit: mm [inch]









▶ Related Products

Mounting Accessories - Standalone NVR Mount

PMAX-1200		19" Rackmount Rails for for GNR-320, GNR-410, INR-406, INR-407, INR-410, INR-460
-----------	---	--

Note: Some mounting accessories may need additional accessories for installation. Please check www.acti.com/mountingselector for more information.


Network & Storage Peripherals - Hard Disk

PHDD-2200		WD WD1005FBYZ 1TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for ENR-0x0P, ENR-110, ENR-120, ENR-130, ENR-22x, ENR-22xP, GNR-310, GNR-320, INR-100, INR-340, INR-430, INR-440, INR-450, INR-460)
PHDD-2301		HGST ULTRASTAR 7K6000 2TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR-0x0P, ENR-22x, ENR-22xP)
PHDD-2501		HGST ULTRASTAR 7K6000 4TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR-0x0P, ENR-22x, ENR-22xP)
PHDD-2702		WD Ultrastar 6TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache
PHDD-2900		WD WD8002FRYZ 8 TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for GNR-310, GNR-320, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460)
PHDD-2A00		WD WD101KRYZ 10TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache (for ENR-xxx, ENR-xxxP, GNR-330, GNR-410, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460, INR-470)
PHDD-2B01		HGST ULTRASTAR 7K6000 12TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache
PHDD-2E01		HGST ULTRASTAR 7K6000 14TB 3.5" Hard Disk Drive, 7200 RPM 512MB Cache

Network & Storage Peripherals - Network IO Module

PIOB-0100		Advantech ADAM-6060 6 Digital Input and 6 Digital Output Network I/O Module
PIOB-0200		Advantech ADAM-4571 1-Port RS-232/422/485 Network I/O Module

Controllers - Joystick

PJSK-0100		Apem 100-550-BLK-RF Joystick for PTZ Control (for all ENR, INR, and MNR Series)
-----------	---	---