

INR-450

200-Channel RAID Rackmount Standalone NVR with Redundant Power Supply with Additional Computing Power



- 12-bay 2U Rackmount Standalone NVR
- Maximum Number of Video Devices: 200 (Free License: 64)
- Hardware RAID 0, 1, 5, 6, 10, 50, 60, (RAID 5: support up to 100 channels)
- Additional Computing Power
- Redundant Power Supply
- Location-based management with e-Map & Google Map
- Workstation, Web Client, Mobile Client
- Event trigger, response and notification
- Video export formats: RAW, AVI, EXE
- Intel Xeon E5-2620 v4, 16GB
- Non-ACTi camera support via licensed Camera Device Pack

► Specifications

Device

Product Type	Standalone NVR
Maximum Resolution	Support all ACTi cameras in all resolutions
Maximum Number of Video Devices	200
Maximum Number of POS devices	200 (requires additional license)
Maximum Number of Access Control and Network I/O devices	200 (requires additional license)
Maximum Number of Clients	Local: 1, Remote: 5
Additional Computing Power	Yes

Hardware

CPU	Intel Xeon E5-2620 v4
RAM	16GB, DDR4, 2400MT/s, 24 DIMM slots, maximum up to 768GB

License

License required	Yes
Free License	64 (64 channels for ACTi and 1 channel for third-party video device)

Live View

Display Layout Mode	Local:1, 3, 4, 5, 6, 8, 9, 10, 12, 16 Remote:1, 3, 4, 5, 6, 8, 9, 10, 12, 16, 18, 24, 25, 35, 36, 48, 49, 64, Custom
Fisheye Dewarping	Yes
Local Live View performance	Please check "Standalone NVR Performance Validator" (http://www.acti.com/SANVRPerformance)
Digital Zoom	Yes
Event Status	Display event status upon alarm or upon connection loss or recovery between server and client or when the allocated disk space is full
Instant Playback	Instant Playback in live view window
Embedded websites in Live View	Display and connect to pre-configured embedded website

Map

e-Map	Yes
Google Map	Yes
Layout	Area maps with camera icons, small live view windows, hyperlinked
Setup	e-Map image upload, Google maps settings and preset management, camera positioning, vision angle and pointed direction of camera, view positioning, source positioning, extended devices for Point-of-sale (POS), Access Control, Network I/O, Car Park
PTZ Mode	Mouse PTZ mode to control e-Map video streams

PTZ

PTZ Control	PTZ Control, Speed Control, 32 preset points
Joystick	USB based joystick supported

Video

Compression	H.265, H.264, MPEG-4, MJPEG
Built-in Analytics	Visual Tracking

Network

Network Protocol & Service	IPv4/v6, TCP, UDP, DHCP Client, HTTP, DNS, NTP, RTP, RTSP, SMTP, FTP, ICMP, ARP, UPnP, iSCSi, LDAP (client)
Ethernet Port	Total ports: 4 port(s) Non-PoE: 4 port(s), Ethernet (1000 Base-T), RJ-45 connector

Recording

Scheduled Recording	Yes
Event Recording	Yes
Manual Recording	Yes
Event Speed-up Recording	Yes
Dual Stream Management	Yes

Maximum Recording Throughput | 300 Mbps

Search & Playback

Playback Control	Continuous forward and backward playback with speeds 1x/2x/4x/8x/16x or frame-by-frame, pause, stop
Synchronized Playback	9 channels (Local), 64 channels (Remote)
Recording Search	Search video recordings by time, events, channels, bookmarks, notifications and listed as clickable time-based thumbnails for full-size view and snapshot download
Smart Search	Smart search of recorded video by Motion Detection and Tamper
Video Export	RAW, AVI, EXE

Event

Video Push	Support Video Push from ACTi Mobile Client devices
Event Trigger	<p>[NVR]: Disk full, Disk not found, Disk is available, Schedule service start and stop, Video Push start and stop, CPU limit exceeded.</p> <p>[Video Device]: Video motion detection, Passive IR sensor, External device through digital input, Sound detection, Intelligent event detection, RFID detection, Video Push start and stop, Video loss, Video Recovery, Network loss and recovery.</p> <p>[Extended Device]: Point-of-sale (POS) status, Network I/O status, Access Control status, Car park status</p>
Event Response	Pop-up window with live video and event confirmation activation, Switch to hotspot window, Switch to customize view, Command a PTZ device to go to a preset point, Play alert sound, Activate external device through digital output, Execute system command to activate other programs, Upload video or snapshot to FTP server, E-mail notification with snapshots, Push notification

Redundancy Server

Redundancy Service	Yes, N-to-N, N+1 (With limited functions when NVR 3 server acts as Redundancy server)
--------------------	---

System

Permission control	Unlimited number of users, Active Directory, Customizable permissions for user groups, Account lockout, Automatic logout after idle, Playback password protected, Password validity period
Client PC Operating System	Windows 7 SP1, Windows 8.1, Windows 10, Windows Server 2008 R2 SP1, Windows Server 2012 R2, Windows Server 2016
Server Operating System	Windows 7 Embedded
Mobile Client Program	Mobile device application (ACTi Mobile Client) supports Live View, PTZ Control, Video Push, Event/time based search and playback, iPad, Android device
USB	2-Port USB 3.0, 1-Port USB 2.0
Language	Multi-Language

Integration

Unified Solution	Fully compatible with ACTi cameras, encoders, central management system, TV wall and intelligent video surveillance software
GPS Position	Manual setting

Edge Recording	Automatically restore the lost videos from the memory card of camera to NVR server via ONVIF (Profile G) or proprietary protocol integrations after network connection recovery.
ONVIF Compliant	Yes, Profile S
Web Browser	IE 11 (Please verify that your computer meets the minimum system requirements for Internet Explorer from Microsoft website.)
Third-party Integration	Point of Sale (POS), Access Control, Network I/O, Parking Management Station (PMS), (Various optional integrations requiring additional license)

Storage

System Drive	2.5" SAS HDD, 300GB
Storage Bay	SAS/SATA, Max. 12 Disk(s) (without storage disks)
HDD Size	3.5"
Maximum Recording Capacity	14TB x12
RAID Level	Hardware RAID 0, 1, 5, 6, 10, 50, 60, (RAID 5: support up to 100 channels)
Supported Storage	Video Recording: SATA disk, iSCSI Video Exporting: iSCSI, USB


Interface

External Storage Interface	iSCSI, USB
Local Access	USB joystick, keyboard & mouse
Local Display Interface	VGA x 2,


General

Power Source	AC 100-240V
Power Consumption	750 W (AC)
Redundant Power Supply	Yes
Weight	17500g (38.581lb)
Dimensions	(W x H x D): 482.4mm x 87.3mm x 723mm (18.99" x 3.44" x 28.46") Rack Space: 2U
Bundled Accessories	Rackmount rails
Mount Type	Rack mounts
Fan	Yes
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	10% - 85% RH
Remote Access	Workstation, Web Client, Mobile Client
Approvals	CE, FCC, UL (for built-in power adapter)
Warranty	3 Year(s). For extended warranty offering, see http://www.acti.com/support/warranty

► Photo Indication

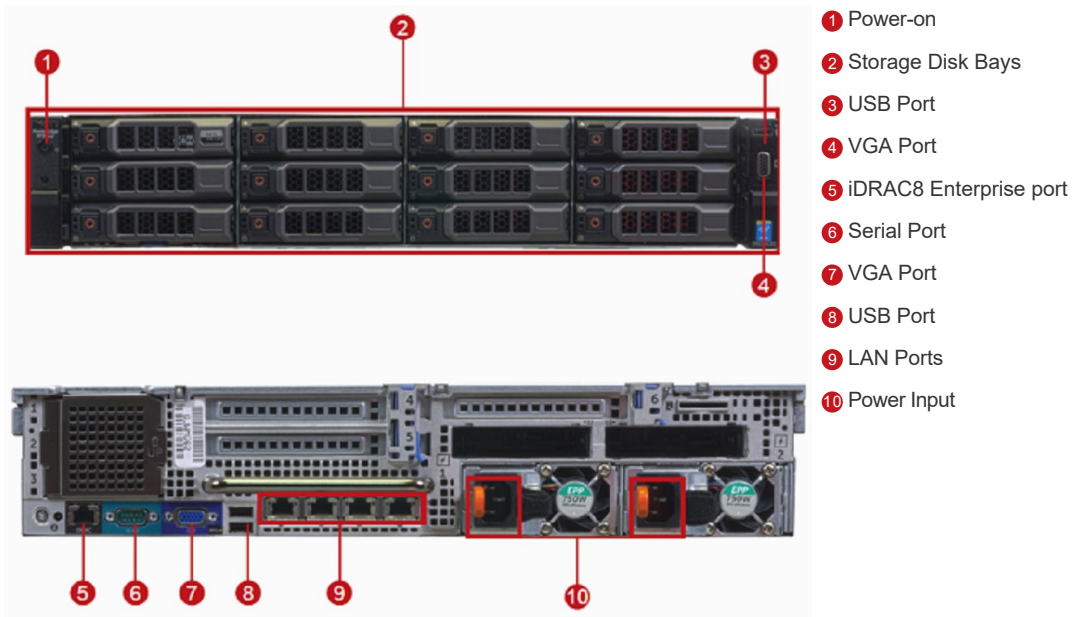



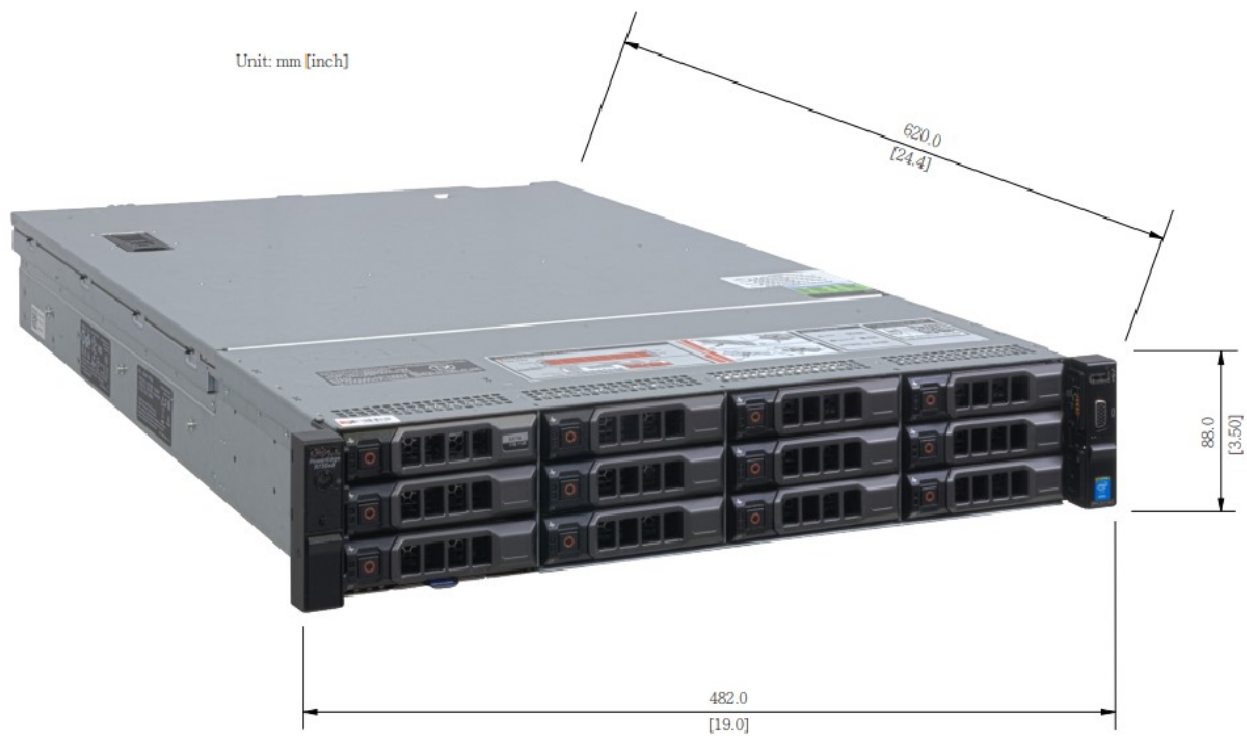






► Dimension Diagram




Unit: mm [inch]

▶ Related Products


Network & Storage Peripherals - Hard Disk

PHDD-1F11		DELL 600G 2.5" Hard Disk Drive, 10000 RPM 600MB Cache Win10 for INR-450
PHDD-2200		WD WD1005FBYZ 1TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for ENR-0x0P, ENR-110, ENR-120, ENR-130, ENR-22x, ENR-22xP, GNR-310, GNR-320, INR-100, INR-340, INR-430, INR-440, INR-450, INR-460)
PHDD-2301		HGST ULTRASTAR 7K6000 2TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR- 0x0P, ENR-22x, ENR-22xP)
PHDD-2501		HGST ULTRASTAR 7K6000 4TB 3.5" Hard Disk Drive, 7200 RPM 128MB Cache (for ENR-1xx, ENR-0x0P, ENR-22x, ENR-22xP)
PHDD-2702		WD Ultrastar 6TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache
PHDD-2900		WD WD8002FRYZ 8 TB 3.5" Hard Disk Drive, 7200 RPM 128 MB Cache (for GNR-310, GNR-320, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460)
PHDD-2A00		WD WD101KRYZ 10TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache (for ENR-xxx, ENR-xxxP, GNR-330, GNR-410, INR-100, INR-340, INR-410, INR-430, INR-440, INR-450, INR-460, INR-470)
PHDD-2B01		HGST ULTRASTAR 7K6000 12TB 3.5" Hard Disk Drive, 7200 RPM 256MB Cache
PHDD-2E01		HGST ULTRASTAR 7K6000 14TB 3.5" Hard Disk Drive, 7200 RPM 512MB Cache


Network & Storage Peripherals - Network IO Module

PIOB-0100		Advantech ADAM-6060 6 Digital Input and 6 Digital Output Network I/O Module
PIOB-0200		Advantech ADAM-4571 1-Port RS-232/422/485 Network I/O Module

Controllers - Joystick

PJSK-0100		Apem 100-550-BLK-RF Joystick for PTZ Control (for all ENR, INR, and MNR Series)
-----------	---	---

Data Cables - USB-Serial Converter Cable

PIOC-0200		USB to RS-232 Serial Converter Cable
-----------	---	--------------------------------------