
# PMAX-0402

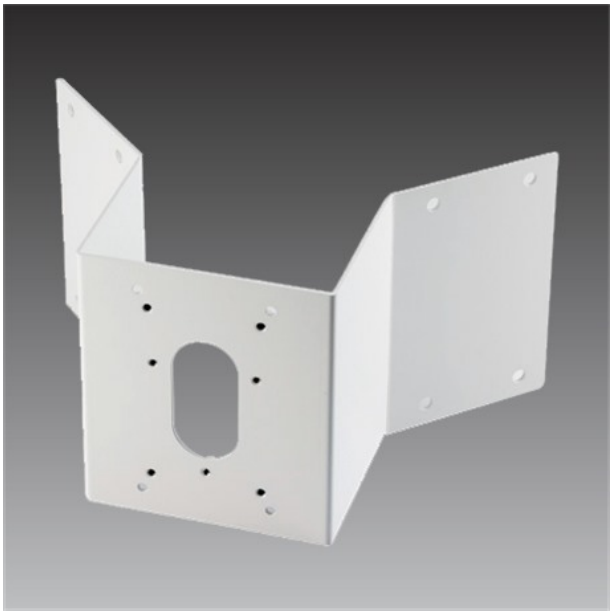

Corner Mount

## Specifications

### Product Profile

| | |
|---|---|
| Product Type | Camera Mount |
| Application Environment | Indoor/Outdoor |
| Description | Corner Mount |

### General

| | |
|---|---|
| Weight | 808g (1.78lb) |
| Dimensions | (W x H x D): 330mm x 206mm x 206mm (13.0" x 8.12" x 8.12") |
| Color | Warm Gray |
| Material | Aluminum |
| Warranty | 1 Year(s) |

## Related Products

### Box - Fixed Box

| | | |
|---|---|---|
| A213 |  | 5MP Box with D/N, Extreme WDR, ELLS, Fixed lens, f2.8mm/F2.0, Auto Back Focus, H.265/H.264, 2D+3D DNR, Built-in Microphone, PoE/DC12V, DI/DO, RS-485 |

| | | |
|---|---|---|
| A29 |  | 2MP Box with D/N, Extreme WDR, ELLS, Fixed lens, f2.8mm/F1.8 (HOV:108.6°), Auto Back Focus, H.265/H.264, 1080p/60fps, 2D+3D DNR, Audio, PoE/DC12V, DI/DO, RS-485 |
| E217 |  | 2MP Video Analytics Box with D/N, Extreme WDR, SLLS, Fixed lens, f2.93mm/F2.0 (HOV:101.3°), H.264, 1080p/60fps, 2D+3D DNR, Audio, PoE/DC12V, DI/DO, RS-422/RS-485, Built-in Analytics |

## Dome - Zoom Dome

| | | |
|---|---|---|
| A811 |  | 4MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom lens, f2.7-13.5mm/F1.6 (HOV:104°-29°), Auto Focus (for installation), H.265/H.264, 1080p/30fps, , 2D+3D DNR, Audio, PoE/DC12V, IP68, IK10, DI/DO |
| A820 |  | 4MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom lens, f2.7-13.5mm/F1.6 (HOV:102.8°-32.4°), H.265/H.264, 3D DNR, Audio, PoE/DC12V, IP68, IK10, DI/DO |
| A821 |  | 6MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom lens, f2.7-13.5mm/F1.6 (HOV:102.1°-34.5°), H.265/H.264, 3D DNR, Audio, PoE/DC12V, IP68, IK10, DI/DO |
| A822 |  | |
| A826 |  | 5MP Outdoor Zoom Dome with D/N, Adaptive IR, Extreme WDR, SLLS, 4.4x Zoom lens, f2.7-12mm/F1.6 (HOV:102.1°-31.5°), P-Iris, Auto Focus, H.265/H.264, 1080p/30fps, 2D+3D DNR, Audio, PoE/DC12V/AC24V, IP66, IK10, DI/DO |
| A828 |  | |

## Hemispheric & Fisheye - Hemispheric Dome

| | | |
|---|---|---|
| A711 |  | 12MP Outdoor Hemispheric Dome with D/N, Adaptive IR, Extreme WDR, SLLS, Fixed lens, f1.65mm/F2.8 (HOV:180°), H.265/H.264, Dewarping, 2D+3D DNR, Built-in Microphone, PoE/DC12V, IP66, IK10, DI/DO |
| A713 |  | 5MP Outdoor Hemispheric Dome with D/N, Adaptive IR, Superior WDR, SLLS, Fixed lens, f1.1mm/F2.4, H.265/H.264, Dewarping, 2D+3D DNR, Audio, PoE/DC12V, IP66, IK10, DI/DO |

## PTZ - PTZ

| | | |
|---|---|---|
| A952 |  | 8MP Outdoor Speed Dome with D/N, IR, Extreme WDR, ELLS, 22x Zoom lens, f6.4-138.5mm/F1.5 (HOV: 62.6°-3.2°), P-Iris, Auto Focus, H.265/H.264, 2D+3D DNR, Audio, High PoE/AC24V, IP66, DI/DO |
| A955 |  | 5MP Deep Learning AI 40x Outdoor Speed Dome with IR LED 250m, WDR 150dB |
| A956 |  | 2MP Outdoor Speed Dome with D/N, IR, Extreme WDR, ELLS, 40x Zoom lens, f4.3-170mm/F1.6 (HOV: 66.1°-1.8°), P-Iris, Auto Focus, H.265/H.264, 2D+3D DNR, Audio, High PoE/AC24V, IP66, DI/DO |
| A957 |  | |
| A959 |  | |
| A981 |  | |

| | | |
|---|---|---|
| A984 |  | 8MP Deep Learning AI 36x Outdoor PTZ with IR LED 100m, WDR 150dB |
| I98-K1 |  | 2MP 33x Ant-Corrosion Outdoor Speed Dome with IR LED 200m, WDR 145dB |
| K953 |  | 5MP Deep Learning AI ColorGuard LightGuard 33x Outdoor PTZ with IR LED 250m, ColorVizion, WDR 145dB |
| K953-2MP |  | |
| K958 |  | |
| Z952 |  | 4MP Outdoor Speed Dome with D/N, Adaptive IR, Superior WDR, SLLS, 25x Zoom lens, f4.8-120mm/F1.5-3.8 (HOV: 52.20°-2.74°), Auto Focus, H.265/H.264, 1080p/30fps, 2D+3D DNR, Audio, High PoE/DC12V, IP66, IK10, DI/DO |
| Z954 |  | 8MP Outdoor Speed Dome with D/N, Adaptive IR, Superior WDR, SLLS, 25x Zoom lens, f6-150mm/F1.5-3.4 (HOV: 60.5°-3.1°), Auto Focus, H.265/H.264, 4K/30fps, 2D+3D DNR, Audio, High PoE/DC24V/AC24V, IP66, DI/DO |
| Z956 |  | 4MP Outdoor Speed Dome with D/N, Extreme WDR, SLLS, 33x Zoom lens, f4.5-148.5mm/F1.5-4.0 (HOV: 51.4°-2.5°), Auto Focus, H.265, 3D DNR, Audio, High PoE/DC24V/AC24V, IP67, IK10, DI/DO, RS-485 |
| Z957 |  | 4MP Outdoor Speed Dome with D/N, Adaptive IR, Extreme WDR, ELLS, 33x Zoom lens, f4.5-148.5mm/F1.5-4.0 (HOV: 51.4°-2.5° ), Auto Focus, H.265/H.264, 2D+3D DNR, Audio, High PoE/DC24V/AC24V, IP66, IK10, DI/DO, RS-485 |
| Z958 |  | 2MP Outdoor Speed Dome with D/N, Adaptive IR, Extreme WDR, ELLS, 16x Zoom lens, f5.0-80mm/F1.7-2.8 (HOV: 51.7°-4.89°), Auto Focus, H.265/H.264, 2D+3D DNR, High PoE/DC12V, IP66, IK10 |