


PMAX-0505

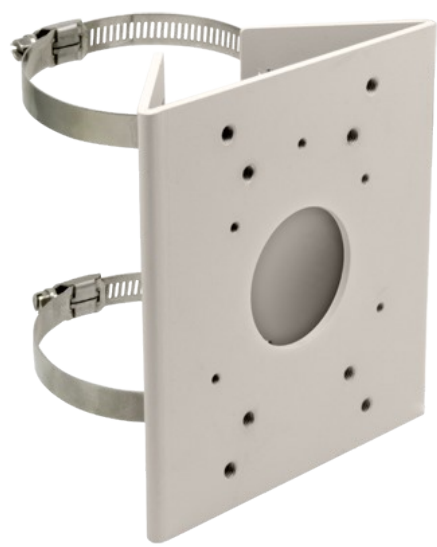

Pole Mount (for B4x, B41x, E44, E45, E46, E48, E44A, E45A, E46A, E41x, I4x, PMAX-0312, PMAX-0313, PMAX-0314, PMAX-0330) , supports 2" to 3" Poles

Specifications

Product Profile

Product Type	Camera Mount
Application Environment	Indoor/Outdoor
Description	Pole Mount (for B4x, B41x, E44, E45, E46, E48, E44A, E45A, E46A, E41x, I4x, PMAX-0312, PMAX-0313, PMAX-0314, PMAX-0330) , supports 2" to 3" Poles

General

Supported Pole Range	2" ~ 3"
Weight	450.5g (0.993lb)
Dimensions	(W x H x D): 137.3mm x 150mm x 120mm (5.4" x 5.9" x 4.7")
Color	Warm Gray
Material	Aluminum
Warranty	1 Year(s)

Related Products

Bullet - Zoom Bullet

B412		3MP Video Analytics Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 10x Zoom lens, f4.7-47mm/F1.6-3.0 (HOV:58°-5.8°), DC iris, Auto Focus, H.265/H.264, 2D+3D DNR, Built-in Microphone, High PoE/DC12V, IP67, IK10 (metal casing), DI/DO, Built-in Analytics
B412-K1		
B419		5MP Video Analytics Zoom Bullet with D/N, Adaptive IR, Extreme WDR, SLLS, 10x Zoom lens, f4.7-47mm/F1.6-3.0 (HOV:50.67°-5.14°), DC iris, Auto Focus, H.265/H.264, 2D+3D DNR, Built-in Microphone, High PoE/DC12V, IP67, IK10 (metal casing), DI/DO, Built-in Analytics
I42		2MP Video Analytics Zoom Bullet with D/N, Adaptive IR, Extreme WDR, ELLS, 36x Zoom lens, f4.6-165.6mm/F1.55-5.0 (HOV:62.7°-2.7°), DC iris, Auto Focus, H.264, 1080p/60fps, 2D+3D DNR, Audio, PoE/DC12V, IP67, IK10 (metal casing), DI/DO, Built-in Analytics
I42-K1		2MP Video Analytics Zoom Bullet with D/N, Adaptive IR, Extreme WDR, ELLS, 36x Zoom lens, f4.6-165.6mm/F1.55-5.0 (HOV:62.7°-2.7°), DC iris, Auto Focus, H.264, 1080p/60fps, 2D+3D DNR, Audio, PoE/DC12V, IP66, IK10 (metal casing), Corrosion-resistant, DI/DO, Built-in Analytics
I47		4MP Zoom Bullet with D/N, Adaptive IR, Advanced WDR, SLLS, 30x Zoom lens, f4.3-129mm/F1.6-5.0 (HOV:66.4°-2.14°), DC iris, Auto Focus, H.264, 1080p/30fps, 2D+3D DNR, Audio, PoE/DC12V, IP67, IK10 (metal casing), DI/DO

Dome - Zoom Dome

A811		4MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom lens, f2.7-13.5mm/F1.6 (HOV:104°-29°), Auto Focus (for installation), H.265/H.264, 1080p/30fps, , 2D+3D DNR, Audio, PoE/DC12V, IP68, IK10, DI/DO
A820		4MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom lens, f2.7-13.5mm/F1.6 (HOV:102.8°-32.4°), H.265/H.264, 3D DNR, Audio, PoE/DC12V, IP68, IK10, DI/DO
A821		6MP Outdoor Zoom Dome with D/N, IR, Extreme WDR, SLLS, 5x Zoom lens, f2.7-13.5mm/F1.6 (HOV:102.1°-34.5°), H.265/H.264, 3D DNR, Audio, PoE/DC12V, IP68, IK10, DI/DO
A822		