PJSK-0100



Joystick for PTZ Control (for all ENR, INR, and MNR Series)

Specifications

Product Profile

Original Manufacturer	APEM
Product Type	Joystick
Original Model	100-550-BLK-RF
Application Environment	Indoor
Description	Joystick for PTZ Control (for all ENR, INR, and MNR Series)
Joystick Performance	Hall effect three axis joystick; X/Y/Z for positioning control
Joystick Travel	36˚ for X and Y axis; 60˚ f or Z axis
Centering	Single spring, Omni-Directional
Pushbutton performance	10 tactile pushbuttons on housing; Two tactile pushbuttons on joystick; 3,000,000 cycles
Supported Protocols	USB HID 1.1 controller, Direct X, Joystick: Three HID axes, Pushbuttons: 12 HID buttons, Standard DirectX HID drivers

System

Operating System	Windows 7, Windows XP, Windows 8, Mac OS, Linux

Integration

Unified Solution	Fully compatible with ACTi video management system


Interface

Joystick Connectors	USB Type A Male; Cable Length: 2m (6.8")

General

Power Source	DC 5V, via USB interface
Power Consumption	Max. 32mA
Weight	440g (0.970lb)
Dimensions	(W x H x D): 156.46mm x 127.76mm x 168.66mm (6.15" x 5.02" x 6.64")
Operating Temperature	-25°C ~ 85°C (-13°F ~ 185°F)
Approvals	EN 55024:1998, EN 55022, CE, FCC Class B, RoHS compliant
Color	Black
Material	Joystick shaft: Stainless Steel Joystick boot: Neoprene Joystick handle: Glass filled nylon Desktop housing: High impact ABS
Warranty	1 Year(s)

Dimension Diagram

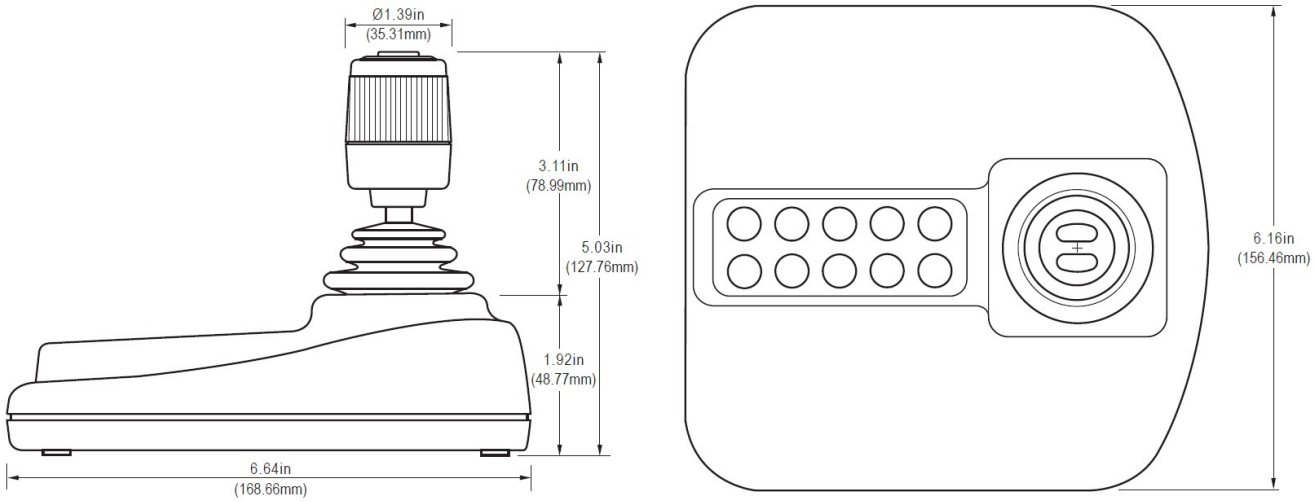

Unit: mm [inch]

Related Products

NVR - Standalone NVR

ENR-010P		4-Channel 1-Bay Mini Standalone NVR with 4-port PoE connectors, Recording Throughput 16 Mbps, HDMI Port, Remote Access, Video Export via USB, 4-Channel Synchronized Playback, 4-channel free license included, Plug & Play with Built-in DHCP Server, 1-Bay (Storage Disks not included), DC 48V
ENR-020P		9-Channel 1-Bay Mini Standalone NVR with 8-port PoE connectors, Recording Throughput 36 Mbps, HDMI Port, Remote Access, Video Export via USB, 9-Channel Synchronized Playback, 9-channel free license included, Plug & Play with Built-in DHCP Server, 1-Bay (Storage Disks not included), DC 48V

ENR-130		
ENR-421		32-Channel 4-Bay Rackmount Standalone NVR with Recording Throughput 300 Mbps, HDMI Port, Remote Access, Video Export via USB, 16-Channel Synchronized Playback, 32-channel free license included, Supports External Storage (iSCSI), Plug & Play with Built-in DHCP Server, 4-Bay (Storage Disks not included), Audio, DI/DO, AC 100-240V